

12-06-99
PATENT APPLICATION TRANSMITTAL LETTER

A

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Date: December 3, 1999

Sir:

Transmitted for filing is a continuation-in-part application under 37 CFR 1.53(b) of:

Inventor(s) : Tom Schilson and Steve Kamps

For : **FLAT CABLE AND MODULAR ROTARY
ANVIL TO MAKE SAME**

Our Case No. : 810EC014

Priority : This application is a continuation-in-part of U.S. Serial No. 08/627,136 filed
April 3, 1996.

This application claims priority of application U.S. Serial No. 08/627,136, filed in
the U.S. on April 3, 1996, as provided under 35 U.S.C. 120, and is hereby
incorporated herein by reference.

Enclosed are:

- ☒ Specification, including claims, 42 pages
☒ 10 sheets of informal/formal drawings
☐ A certified copy of _____ application
Ser. No. _____, filed _____
for which priority is claimed
☒ Declaration and Power of Attorney
☒ Assignment; Recordal Form
☒ An Information Disclosure Statement (IDS)

Basic Fee: \$ 760.00

Additional Fees:

- 59 Total Number of claims in excess of 20, multiplied by \$18.00 \$1,062.00
(Each multiple dependant claim should be counted as the number of claims from
which it depends)
6 Number of independent claims in excess of 3, multiplied by \$78.00 \$ 468.00
Surcharge for one or more multiple dependant claims
multiplied by \$260 \$ 00.00

TOTAL FILING FEE \$2,290.00

☒ The Commissioner is hereby authorized to charge our DEPOSIT ACCT. NO. 13-2980
for the \$2,290.00 filing fee. (A duplicate of this sheet is enclosed.)

☒ The Commissioner is hereby authorized to charge any deficiencies, or to credit any
overpayment to our DEPOSIT ACCT. NO. 13-2980

"Express Mail" number ESD 58308855 US

Date of Deposit Dec. 3, 1999

I hereby certify that this transmittal
form and attached papers are being deposited
with the United States Postal Service

"Express Mail Post Office to Addressee"

service, under 37 CFR § 1.10 on the date

indicated above and is addressed to the

Commissioner of Patents and Trademarks,

Washington, D.C. 20231.

Sandy Barrios

Respectfully submitted,

By:

Karl D. Kovach

Karl D. Kovach
Reg. No. 40,278
Methode Electronics, Inc.
7444 West Wilson Avenue
Chicago, Illinois 60656
Tel.: (708) 867-9600

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

Be it known that we, **Tom Schilson**, a citizen of the United States of America and a resident of 861 East County Road #1220, Hamilton, Illinois, and **Steve Kamps**, a citizen of the United States of America and resident of 115 North 600 N, Warsaw, Illinois, have invented a

FLAT CABLE AND MODULAR ROTARY ANVIL TO MAKE SAME

of which the following is the specification.

This application is a continuation-in-part application of co-pending U.S. Patent Application Serial Number No. 08/627,136 filed April 3, 1996, and claims priority to and hereby incorporates herein by reference the same.

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention pertains to flat cable and an apparatus for making flat cable. The invention more particularly concerns flat electrical cable with exposed conductors without adhesive residue and a modular rotary anvil which is used to manufacture the flat electrical cable.

Discussion of the Background

Flat electrical cables are well known in the art having conductors sandwiched between two insulating layers. Flat conductor cable is known in the art having an upper insulator layer having an adhesive adhered to a first side of the upper layer and a lower layer of insulating material having an adhesive adhered to a first side of the lower layer. A conductor or strands of conductors are placed between the upper and lower insulator layers and all three layers are secured together by the adhesive. However, use of adhesive to bond the layers is disadvantageous in that upon heating of the adhesive, the conductors may float in the free flowing adhesive causing the spacing between the conductors to be inconsistent and non-parallel. Upon drying and attempted attachment of the flat cable to a component, the improperly placed conductor may not align with the conductive leads of the component the cable is to be attached and, thus, the flat cable is unusable and must be discarded. Further, when the cable is stripped to expose the conductors for connection of the cable to a component, the conductors have an adhesive residue thereon which inhibits the conductive

properties of the conductor. Also, if any scrap material of the insulator layers is produced, the scrap may not be recycled due to the presence of the adhesive on the insulator layer.

Other bonding techniques are known in the art for bonding multiple layers such as ultrasonic welding. Generally ultrasonic welding has been used for spot welding with thermoplastic materials using either a plunge mode or a shear mode. Therefore, the known methods of welding thermoplastic materials using ultrasonics did not provide for a continuous welded seam where the seam has great pull strength. In the area of electrical cables, seams of great pull strength are required and the previously known welding techniques are not sufficient.

The ultrasonic welding apparatus includes an ultrasonic welding machine 1, as shown in Figures 14 and 15. The ultrasonic welding machine 1 includes inner and outer brackets 2 and 3, the anvil frame 4, the horn 5, the pattern roller or rotary anvil 6 mounted to the anvil frame 4, a chain 7 to rotate the rotary anvil 6. However, other methods of rotating the rotary anvil 6 can be used. Socket head cap screws 8 attach the outer bracket 3 to the anvil frame 4. The rotary anvil 6 is mounted in opposition to the horn 5. As shown, in Figures 14 and 15, the work-piece (not shown) is fed into and through the gap 9 present between the horn 5 and the rotary anvil 6. As the horn 5 plunges or shears against the work-piece, the rotary anvil 6 remains rigid in the opposing direction of the force and subsequent impacting of the work-piece by the horn 5, thus reacting the forces generated by the process. In this example, as shown in Figures 14 and 15, the horn 5 does not rotate. As such, no pattern is formed on the side of the work-piece facing the horn 5, if the surface of the horn is flat and smooth. As the work-piece passes through the gap 9 between the horn 5 and the rotary anvil 6, the rotary anvil 6 rotates. Thus, a pattern can be imprinted on the surface of the work-piece. Such a method of manufacture requires that a unique anvil be created and inventoried

for every type of and size of pattern desired to be formed on the work-piece.

SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide a flat electrical cable which is
5 bonded without use of adhesives and provides for a continuous seam.

It is another object of the invention to provide a flat electrical cable that is light in weight.

It is still another object of the invention to provide a flat electrical cable that has a high
natural frequency.

It is a further object of the invention to reduce the number of tools required to be kept in
10 inventory for producing the flat electrical cable.

It is another object of the invention to increase the variety of tool sets being run at the same
time.

It is an additional object of the invention to support flexible manufacturing of flat electrical
cable.

It is another object of the invention to provide a method of assembling a flat cable by
15 bonding without using adhesives and to provide the capability of forming a continuous seam and
other types of seams.

It is a further object of the present invention to provide a flat cable having exposed
conductors without an adhesive residue.

It is another object of the present invention to provide a flat electrical cable which operates
20 quietly during use in a clockspring.

It is a further object of the invention to provide a durable flat electrical cable.

In still another embodiment of the invention, a flat cable is provided comprising an upper insulator layer, a lower insulator layer, and an intermediate layer. The lower insulator layer connected to the upper insulator layer along substantially continuous parallel spaced apart seams. The intermediate layer comprised of conductor groups which lie adjacent and substantially parallel to the seams. Furthermore, the conductor groups do not have an adhesive residue on their outer surface.

In another embodiment of the invention, a flat electrical cable is provided comprising an upper layer of polyester having a ribbed surface, a lower layer of polyester connected to the upper layer along substantially continuous parallel spaced-apart ultrasonically bonded seams and individual strands of copper conductors lying substantially parallel and adjacent to the seams between the upper and lower layers. The lower layer may have a pattern along the majority of its exposed surface. Seams positioned between adjacent conductors have a textured surface pattern, and seams positioned along edges of the flat electrical cable have a substantially smooth surface pattern.

In another embodiment of the invention, a clockspring is provided for electrically connecting an airbag in a steering wheel of a vehicle through a steering column to crash sensors, the clockspring comprising a housing having an inner chamber and a flat electrical cable including an upper insulator layer, a lower insulator layer connected to the upper layer along substantially continuous parallel spaced-apart seams and an intermediate layer comprised of individual strands of conductors which lie adjacent and substantially parallel to the seams and the conductors do not have an adhesive residue thereon, the flat electrical cable being mounted in the chamber of the clockspring. Seams positioned between adjacent conductors have a textured surface pattern, and

seams positioned along edges of the flat electrical cable may have a substantially smooth surface pattern.

In a further embodiment of the invention, a modular rotary anvil for an ultrasonic welding machine is provided comprising a first end segment, a second end segment, and a at least one insert having a first side and a second side, each of the first side and the second side configured to attach to at least one of other inserts, the first end segment, and the second end segment. The first end segment and the second end segment configured to attach to the ultrasonic welding machine.

In another embodiment the invention takes the form of a method of assembling a flat electrical cable. The steps of producing the flat electrical cable include simultaneously feeding an upper and lower layer of insulating material and an intermediate layer of conductors between a horn and a modular rotary anvil, and the next step being ultrasonically bonding the upper and lower layers together along a seam substantially adjacent the conductors.

In still yet another embodiment the invention takes the form of a method of assembling a clockspring. The steps of producing the clockspring include inserting a flat cable into a clockspring housing, where the flat cable is made pursuant to the method steps recited in the paragraph above.

These and other features of the invention are set forth below in the following detailed description of the presently preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings,

wherein:

Figure 1 is a perspective view of the flat cable of the present invention;

Figure 2 is a side-elevation view of the preferred apparatus for bonding of the flat cable;

Figure 3 is an enlarged view of the bonding area of Figure 2;

5 Figure 4 is a side-elevation view of the assembly machinery and process of the present invention;

Figure 5 is a perspective view of an alternate embodiment of the flat cable of the present invention showing the flat electrical cable after the end portion has been stripped to expose the conductors;

10 Figure 6 is an enlarged view of the bonding area of Figure 2 where a modular rotary anvil is shown being used with a horn moving in a plunging action;

Figure 7 is a perspective view of an alternate embodiment of the flat cable of the invention which was formed with the use of the modular rotary anvil;

Figure 8A is a front view of one embodiment of the modular rotary anvil;

15 Figures 8B is an expanded detailed view of Figure 8A;

Figure 9A is a front view of another embodiment of the modular rotary anvil;

Figures 9B is an expanded detailed view of Figure 9A;

Figures 10A and 10B are a side view and a front view of a large bracket insert from Figure 8A;

20 Figures 11A and 11B are a side view and a front view of a small bracket insert from Figure 8A;

Figures 12A and 12B are a side view and a front view of one knurled insert from Figure

8A;

Figures 13A and 13B are a side view and a front view of one smooth seam insert from Figure 8A;

Figure 14 is an exploded side view of a related ultrasonic welding machine;

5 Figure 15 is a side view of an assembled, related, ultrasonic welding machine of Figure 14;

Figure 16 is a perspective view of another alternate embodiment of the flat cable of the invention which was formed with the use of the modular rotary anvil;

Figure 17 is an expanded view of a portion of an alternate knurl pattern;

Figure 18 is an end view of a single conductor;

Figure 19 is an end view of dual or tandem conductors;

Figure 20 is an end view of dual stacked conductors;

Figure 21 is an end view of tripled stacked conductors;

Figure 22 is an end view of a wire rope conductor;

Figure 23 is an end view of a compressed wire rope conductor;

Figure 24 is an exploded, perspective view of a single flat conductor assembled with upper and lower insulation layers;

Figure 25 is an exploded, perspective view of a dual tandem conductor group assembled with upper and lower insulation layers;

20 Figure 26 is an exploded, perspective view of a triple stacked conductor group assembled with upper and lower insulation layers;

Figure 27 is an exploded, perspective view of a dual stacked conductor group assembled

with upper and lower insulation layers; and

Figure 28 is an exploded, perspective view of a wire rope conductor group assembled with upper and lower insulation layers.

5 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, and more particularly to Figure 1 thereof which shows a finished flat conductor cable 10 of a preferred embodiment of the present invention.

The flat cable 10 has an upper layer 20 and a lower layer 30 formed of an insulating material. In a preferred embodiment, polyester insulator is used, such as that having a thickness of .001 inches.

However, thicker insulator materials may be used to provide stronger bonds, such as where the seams are narrow. Intermediate the upper and lower layers 20, 30 are conductors 40. The conductors 40 are made of individual strands of metallic material which lie substantially parallel to one and another along the length of the cable 10. In a preferred embodiment, the conductors are

formed of annealed copper having a dead soft hardness rating. However, any other conductor may be used such as copper clad steel. Furthermore, the conductor can be replaced with a fiber optic cable. The conductors 40 are separated by seams 50. The seams 50 are formed by the continuous

bonding between the upper layer 20 and the lower insulator layer 30. A plurality of parallel spaced-apart seams 50 run continuously along the length of the cable 10. In a preferred

embodiment, the spacing between the plurality of conductors 40 comprises the seams 50. In other words, the width of each seam 50 approximately equals the space between the adjacent conductors 40. In such a construction, the conductors 40 are trapped in a pocket or encapsulated

between the seams 50 and the upper and lower insulator layers 20, 30 to avoid any shorting between the parallel strands of conductors 40. In a preferred embodiment, the seams 50 are ultrasonically bonded, which will be discussed further below.

The cable 10 includes a raised surface 25 or ribs above the conductors 40 on the upper layer 20 of the insulator. The raised surface 25 provides for a ribbed texture along the upper surface 20 of the cable 10 and reduces the surface area of the upper layer 20 so that less friction is created when the upper layer 20 rubs against another surface. In an embodiment where the flat cable 10 is wound in a spool, the noise of the surface of the upper layer 20 of the flat cable 10 rubbing against the lower layer 30 will be reduced due to the ribs 25. In addition, in another embodiment, the lower layer 30 of the flat cable 10 has a pattern 35 adhered thereto. The pattern 35 acts to reduce the surface area of the most extraneous portions of the lower layer 30 in order to further reduce friction and noise of the lower layer 30 rubbing against another surface.

In the preferred method of assembling the flat cable 10, the bonding of the upper and lower layers 20, 30 occurs only at the plurality of seams 50 and no bonding of the upper layer 20 or lower layer 30 occurs to the conductors 40. In such an arrangement, the conductors 40 are bounded on each side by the seams 50 but are loose in the compartment formed by the upper and lower layers 20, 30 which are not bonded in the area along the length of the conductor 40. This arrangement provides an advantage in that when the end of the cable 10 is stripped and the conductors 40 are exposed, the exposure operation is simplified in that there is no bonding between the conductors 40 and the upper or lower layers 20, 30. Therefore, there is no residue on the conductors 40 and cleaning of the conductors is not required in order to provide the desired level of conductivity. An edge 15 of the flat cable 10 is also bonded and has a continuous seam such as

provided by an ultrasonic weld. This edge 15 may be provided by cutting the flat cable 10 via slitting station 89 shown in Figure 4. The edge 15 produced by cutting is a smooth edge or surface. The smooth surface of the edge 15 results in a flat electrical cable which provides for quiet operation during use in a clockspring, even though the edge 15 contacts sound damping material of the clockspring housing.

In the preferred embodiment, the seam 50 is continuous and runs along the entire length of the cable 10. The preferred use of the flat electrical cable 10 of the present invention is in an automobile clockspring which provides for the electrical connection of the airbag of an automobile steering wheel through the steering column to stationary crash sensors in the automobile. In such clocksprings, the flat ribbon cable is wound around an inner chamber of the clockspring housing and generally has a length of approximately two feet. In the process described below, the flat cable is formed continuously in spools of over one-thousand feet or any desired length. The spool of cable is later cut to two foot lengths and the ends of the two foot lengths are stripped. In the preferred embodiment of the invention, the overall length of the seams will be equal to the length of the entire spool of cable, as the seams 50 are continuous.

In an alternate embodiment, the seam may be noncontinuous at the separation areas of the cable 10. Thus, the majority of the length of the cable 10 has a continuous seam 50 except at the end of that portion of the cable having a desired length to be used and attached to a component. For example, at two foot intervals along the length of the cable 10 a narrow nonbonded separation area may be formed. The nonbonded areas are located at the point along the cable where it is intended that the flat cable will be cut or separated. A nonbonded area will be formed every two feet of the cable so that the end portions of the two foot lengths of the flat cable 10 will have small areas, for

example, one inch lengths, which are nonbonded. In this way, the ends of the cable may be easily processed in order to expose the conductors 50. Having the nonbonded areas allows for the top and bottom layers to easily be clipped or cut to expose the conductors 40. In the previously mentioned embodiment having completely continuous seams, the desired lengths of the flat cable must be inserted in a grinding or buffing machine in order to remove the layers of insulation and expose the conductors or cut the insulator layers from between the conductors. The method of forming the nonbonded areas at specific intervals along cable will be discussed further below.

An alternate embodiment of the present invention may be provided having multiple layers of insulating material and conductors therebetween. Additional layers may include ground wires or a ground plane or a drain wire or additional layers to limit cross talk.

The method of assembling the flat cable of the present invention is best understood with reference to Figures 2-7. One specific bonding process will be discussed with reference to Figures 2, 3 and 6 and the overall process with reference to Figure 4. Turning to Figure 2, a rotary horn 60 is shown having weld surface 65. Adjacent the rotary horn 60 is rotary anvil 70. The rotary anvil 70 rotates about axis 71 and rotary horn 60 rotates about axis 61. The rotary horn 60 provides for the ultrasonic bonding of the flat cable which is inserted between the rotary horn 60 and the rotary anvil 70. In a preferred embodiment, a full wave rotating horn of titanium is used in order to provide for a weld surface 65 of greater than one inch. In a preferred embodiment, the weld surface 65 is three inches wide. The three inch wide weld surface 65 is preferred so that the maximum footage of flat cable 10 may be produced. Although in the preferred embodiment of the end use of the cable 10 widths are approximately one-half inch, the three inches wide weld surface 65 allows for the simultaneous assembly of six cables side-by-side, to be separated later.

The three inch weld surface 65 provides for the maximum width without sacrificing a uniform amplitude level of the rotary horn 60 so that the ultrasonic bond strength is maintained. In one embodiment, the full wave horn 60 provides for ultrasonic bonding via a shear mode or in the horizontal direction of arrow 67. The use of the full wave horn having a shear mode provides for continuous welding to form a continuous seam 50 of the flat cable 10. As is known in the ultrasonic bonding art, the rotary horn 60 is attached to a converter and a booster which generates a voltage which creates a wave which passes through the rotary horn 60 and causes the rotary horn 60 to oscillate or vibrate in the direction of arrow 67. In one embodiment, the horn will vibrate at approximately 20 kHz. However, the horn can be vibrated at frequencies in the range of 30 or 40 kHz. Furthermore, the rotary horn 60 can be vibrated in the plunge mode, as is described below.

Turning to Figure 3, an enlarged view of the Figure 2 shows the bonding area between the weld surface 65 of the rotary horn 60 and the rotary anvil 70. The rotary anvil 70 includes a plurality of copper locating grooves 72 and interspersed between the grooves 72 are protrusions 74.

The flat cable is fed between the weld surface 65 of the rotary horn 60 and the rotary anvil 70 at gap 68 so that the upper insulator layer 20 is adjacent the rotary anvil 70 and the lower layer 30 is adjacent the rotary horn 60. The grooves 72 and protrusions 74 of the rotary anvil 70 are designed and oriented according to the specific arrangement and spacing of conductors desired in the flat cable. In the embodiment shown in Figure 3, the rotary anvil 70 has been designed to form a flat cable having six conductors as can be seen by the group of six grooves 72. The rotary horn 70 is designed so that a batch of flat cables are formed simultaneously side-by-side which may be separated later during the assembly process. The broad protrusion 75 provides for a broad space in order to allow for the separation of individual flat cables. In a preferred embodiment, the anvil and

weld surface 65 of the rotary horn 60 are designed to make six individual cables simultaneously side-by-side, each having six conductors. In the present embodiment, the entire bonding surface between the weld surface 65 of the rotary horn and the rotary anvil 70 is three inches wide. Each individual flat cable is approximately half of an inch wide and therefore, six individual cables can be formed simultaneously and later split in order to form the individual flat cables. Therefore, in the preferred embodiment, the rotary anvil 70 will have five wide protrusion areas 75 in order to form six separate areas having six grooves 72 to form each individual flat cable having six conductors therein. The grooves 72 have a width just slightly larger than the width of the conductors being bonded within the flat cable. In the preferred embodiment, the width of the grooves 72 is .045 inches. The spacing of the conductors is determined by the width of the protrusion 74. In the preferred embodiment, the protrusions 74 all have the same width of approximately .0338 inches. However, all these dimensions may vary dependent on the overall design and requirements of cable desired. In an embodiment, the rotary anvil 70 may be interchangeable with other rotary anvils having different spacing of the grooves 72 and protrusions 74 to assemble a flat cable having differently spaced conductors. In a preferred embodiment, as discussed below, the rotary anvil 70 takes the form of a modular rotary anvil 70a as shown in Figure 6, where multiple rotary anvils 70 are not required to be on hand to produce flat cable having different spacing of the grooves.

The upper and lower insulator layers having conductors arranged in between and spaced corresponding to the spacing of the protrusions 74 of the rotary anvil 70 are fed between the rotary anvil 70 and the rotary horn 60 where bonding of the assembly will occur. The height of the gap 68 between the protrusions 74 and the weld surface 65 is slightly less than the combined height of the

two layers of the insulator. Therefore, upon insertion of the upper and lower insulator layers between the weld surface 65 of the rotary horn and the rotary anvil 70, the insulator layers are compressed between the protrusions 74 and the weld surface 65. The conductors 40 of the flat cable 10 are spaced correspondingly to the grooves 72. The conductors 40 fill the space in each groove 72 above the weld surface 65. The grooves 72 have a predetermined depth in order to avoid the welding of the conductors to the upper and lower insulator layers 20, 30. As the depth of the grooves 72 increases, the amount of tension placed on the lower layer 30 of the flat cable against the weld surface 65 is reduced so that welding does not occur between the conductor and the insulator layers 20, 30. In a preferred embodiment, the grooves 72 have a depth of .004 inches.

In one embodiment, the insulator layers 20, 30 and conductors 40 are fed through the gap 68 at a speed of approximately 4 inches per second. The vibrating rotary horn 60 creates a frictional heat at the weld surface 65. Bonding occurs at the points where the protrusions 74 compress the insulator layers against the active weld surface 65. The compressive force between the protrusion 74 and the weld surface 65 cause the bonding between the upper and lower insulator layers to occur only at this interface. The protrusions 74 also provide for the shape of upper insulation layer 20 of the flat cable 10. The grooves 72 form the raised area 25 of the flat cable 10 and the protrusions 74 form the depressed seams 50. Further the weld surface 65 of the rotary horn 60 includes a pattern which is burned into the lower layer 30 of the insulator. In one embodiment, the pattern on the weld surface 65 is 90° knurl.

It can thus be understood that there is no bond between the upper and lower insulators at the groove area 72 in which the conductor is located. Therefore, upon the process of exposing the conductors in order to provide for attachment of the flat cable 10 to a component, the conductors 40

may be easily exposed because there is no insulator material adhered to the conductors 40. Further, it can be understood that the present invention overcomes the prior art in that there is no adhesive bonded to the conductors in that the bonding of the present invention only occurs at the predetermined areas where the protrusions 74 are located.

5 Turning to Figure 4, the overall method of assembly of the flat cable 10 may be understood.

The operation starts on the right side where multiple conductor reels 81 are mounted. In one embodiment, copper is used as conductors and these copper reels are purchased from Torpedo Wire Company (Pittsfield, Pa). The conductors are pulled off of the conductor reels 81 and fed through the wiping area 82 in order to bring the conductors to the same plane and to clean the metallic conductors and remove any residue which might reduce conductivity. The conductors are then fed through the wire separation module 83. The conductor wires are then fed through the conductor straightening module 84 which is a series of grooved rollers that align the conductors. The conductors are then aligned in their final orientation by the conductor guide 85. The conductor guide 85 includes grooves which are spaced corresponding to the grooves 72 of the rotary anvil 70.

10 Because the present method does not use adhesives and such liquid adhesives are not present on the insulator layers, the conductors remain positioned on the insulator layers according to the conductor guide 85. Further, the grooves 72 on the rotary anvil 70 also act to maintain the spacing of the conductors 40. The upper insulator reel 86 and lower insulator reel 87 include tension control means and are fed along with the conductor wires between the rotary horn 60 and the rotary
15 anvil 70. The rotary anvil 70 includes guides along its edges in order to align the upper and lower insulator materials and the array of conductor wires. In a preferred embodiment, the upper and lower insulator materials are a clear polyester purchased from Plastic Suppliers, Inc. (Chicago
20

Heights, IL).

The rotary horn 60 is controlled by the sonic controller and power supply 88. In one embodiment, the power supply is an Amtech 920 MA advanced high frequency constant amplitude power supply providing a 20 KHz at 2,000 watts (Amtech, Inc., Milford, Conn.). In a preferred
5 embodiment, the controller includes a speed control in order to increase and decrease the speed of the assembly process. The power supply would also include an encoder in order to reduce the power when the process is slowed. When the various reels feeding the process need to be exchanged, it is desirable to slow down the process so that the reels may be changed more easily. The encoder and speed control features are coordinated in order to allow for this process. In an
10 alternate embodiment, the controller will include a continuous mode adjustment which allows for the bonding to occur in a continuous mode or a noncontinuous mode and set the intervals at which the bonding will occur. As discussed above, it may be desirable to provide for nonbonded areas at the ends of the desired lengths of the flat cable where it will be separated. The continuous mode feature will provide for the "off" function of the ultrasonic welding for a preprogrammed amount of
15 time so that a specific distance of the flat cable may have a nonbonded area and the automatic switching of the ultrasonic bonding back to an "on" position in which the continuous bonding is resumed. The controller in a preferred embodiment also includes an amplitude adjustment in order to vary the amplitude in order to control the bonding quality of the rotary horn. In a further alternative method of forming flat cable, insulator layers having windows at predetermined
20 intervals may provide prestripped areas in which the conductors are exposed even during bonding.

Adjacent the rotary horn 60 is a cooling mechanism in order to cool the weld surface 65 of the horn 60. Also adjacent the bonding area may be a means of testing the presence and quality of

the bond at the seams 50. In a preferred embodiment, a vision system may be used to test the seams 50. As the polyester used as insulators in the preferred embodiment is clear and the rotary horn includes a pattern, the bonded seams are not clear. Thus, a vision system may be programmed to test the clarity of the patterned bonded seams 50 of the successfully welded flat cable 10. If the cable is not bonded, the seams will remain clear and light will pass through the seam 50 without distortion and the bond testing means may be programmed to shut down the assembly process. Such a system may also be programmed to test and record the bonded and nonbonded areas as discussed above in an alternate embodiment.

The bonded flat cable is then pulled through cable splitter 89 in order to split the full widths of the cable into the desired widths of the subgroups of usable flat cable. As discussed above, in a preferred embodiment, the flat ribbon cable is bonded in three inch wide segments and then separated into six, half inch wide cables having six conductors each. The individually spliced flat cables then move through puller rollers 90. The puller rollers 90 pull the insulator layers and the conductor wires through the entire assembly process. Finally, the individual flat cables are received by take-up reels 91. The reels with the flat ribbon cable may then be transported to the specific areas where the flat ribbon cable 10 is to be used and the flat ribbon cable 10 would be cut to the desired lengths and have the ends processed in order to expose the conductors for attachment to a component such as a clockspring. In an alternate embodiment, the assembly process may have incorporated into it the cutting of the flat cable to the desired length and the process for exposing the conductors.

The stripping process may include the insertion of the end of the flat cable between a rotary grinding machine in order to grind off the upper and lower insulator layers to leave the conductors

exposed. The excess area beyond the exposed conductors may then be trimmed so that bare exposed conductors protrude from the end of the flat cable so that they may be mounted to a component such as an electrical connector and soldered thereto. In an alternate method of stripping the cable ends, a plurality of spaced, adjacent knife blades or punches may penetrate the insulator layers and pull the insulator layer from between and off of the conductors. The present invention provides for the flat cable having the conductors mounted between the insulator layers but not bonded to the insulator layers which provides for an easier stripping process. Because the conductors are not bonded to the insulator layers, the layers of insulation may more easily be stripped and removed from the surface of the conductors. Therefore, after the stripping process, the flat cable is left having protruding conductors without any adhesive residue. Further, in a preferred embodiment, the stripped conductors do not have any insulator residue either. Thus, it can be understood that the present invention provides for a flat cable having exposed conductors which do not have any residue which may inhibit the conductivity of the conductors and provide for a clean surface for the attachment of the conductors to a metallic surface and to allow for a successful soldering process where desired.

Furthermore, since the flat cable 10 does not use an adhesive to bond the upper layer 20 to the lower layer 30, the flat cable 10 is lighter in weight than is a flat cable made using adhesives to bond the insulating layers and conductors together. Testing has shown that when a flat cable having seven conductors, each conductor having a cross-section of 0.007 inches by 0.040 inches, was made having insulating layers of polyester each 0.0003 inches thick. The resulting flat cable weighed 43.5 grams for a ten foot length and the a flat cable made with the same insulating materials and conductors and using an adhesive weighed 48.9 grams for a ten foot length. Thus, the

sonically welded flat cable weighed 5.4 grams less for a ten foot length as compared to the flat cable made using adhesive material. Therefore, for a seven conductor flat cable having polyester insulating layers the flat cable has a per unit length linear density of 4.35grams/foot. The lower weight of the flat cable 10 generally tends to increase the natural frequency of the flat cable 10.

5 Thus, when the flat cable 10 is installed in a device such as a clockspring, the flat cable 10 is not as susceptible to low frequency vibrational energy often experienced in clocksprings. Therefore, the device which uses the flat cable 10 will tend to be more quiet than a device which does not use flat cable 10.

Figure 5 is an alternate embodiment of the present invention showing the flat electrical cable 10 after the end portion has been stripped to expose the conductors 40. The flat cable 10 shown in Figure 1 discloses the cable 10 in its condition after the bonding procedure discussed above. The cable 10 after the bonding procedure has the conductors enclosed within the upper and lower insulator layers 20, 30. In order to use the flat cable 10 and enable it to be attached to a component, the conductors 40 must be exposed. As discussed above, the conductors may be exposed by stripping the cable to remove the upper and lower insulator layers at an end portion of the cable. As discussed above, procedures such as grinding or cutting the insulator layers with a knife may be used, in addition to the above procedure providing for nonbonded areas. Figure 5 shows the flat cable 10 after a stripping procedure has been applied to the cable having the array of conductors 40 exposed at the end portion. The conductors 40 protrude from between the upper and lower layers 20, 30 of the insulator and are surrounded on the upper side of the conductor 40 by the rib 25 of the upper layer 20 and having seams 50 on each side of the conductor 40. According to the advantages disclosed in the above invention, the conductors 40 do not have any adhesive

residue thereon. After stripping of the end of the cable 10, no further procedure such as a cleaning of the conductors is necessary. Due to the bonding method discussed above, without use of adhesives, the conductors are clean and do not have residue which inhibits the conductivity of the metallic material. Following the stripping procedure and the exposure of the conductors 40 as shown in Figure 5, the flat cable may then be attached to a component by soldering the array of conductors to a connector or inserting the conductors into an electrical connector. Thus, it may be understood according to the above description that the present invention provides for a cable 10 which may be manufactured quickly and easily and provide for a cost savings as well as providing for a finished cable which may be more easily stripped and attached to a component. As an example, the component may be an electrical connector mounted to a housing of a clockspring.

In another embodiment, a perspective view of a preferred knurled flat cable 100 is shown in Figure 7. The knurled flat cable 100 of Figure 7 is similar to the flat cable 10 of the embodiment discussed above, the differences between the two flat cables are discussed below. The upper layer 120 is bonded to the lower layer 130 preferably by ultrasonic welding using the plunging mode. The plunging direction 167 is shown in Figure 6. Figure 6 is a view of the horn 65 and anvil 70 assembly of Figure 2 where the rotary horn 65 operates in the plunge mode and the anvil is a modular rotary anvil 70a. The modular rotary anvil 70a is used to produce the knurled flat cable 100, where the modular rotary anvil 70a has knurled protrusion 74a, smooth broad protrusions 75, and smooth broad edge protrusions 75a. The knurled protrusions 74a form the knurled surface texture pattern on the knurled seams 150 of the knurled flat cable 100. The smooth broad protrusions 75 and 75a form the smooth continuous edge seams 115. The grooves 72 of the modular rotary anvil 70a form the raised surfaces or ribs 125. Conductors 140 comprise an

intermediate layer between the upper layer 120 and the lower layer 130. An optical fiber 141 having at least one buffer coating is also shown in Figure 7 in place of one of the conductors 140, as another embodiment of the invention. However, all of the conductors 140 could be replaced with fiber optic cables 141.

5 Experimental testing has shown that use of the plunge mode provides the most durable manufacturing method. Use of flat cable has shown that when seams between adjacent conductors have a knurled surface texture pattern 150 and the continuous edge seams 115 have a smooth continuous surface texture pattern such a flat cable is quiet in operation and provides for low torque when installed in a clockspring. The knurled center seams provide a low amount of surface area contact when the tape contacts itself, thus reducing friction and hence torque, when in a clockspring the flat cable is coiled up around itself. The smooth edge seam of the flat cable provides a smooth contacting surface between the flat cable and the interior surfaces of the clockspring housing and parts therein such as damping material. Other embodiments were tested. No other form of flat cable performed as well. One test was conducted on a flat cable where all of the seams were knurled. Another test was conducted on a flat cable where all of the seams were smooth and continuous. Further testing compared flat cable bonded by the shear mode to flat cable bonded by the plunge mode of ultrasonic welding. Such durability is required when the knurled flat cable 100 is used in a clockspring. Flat cable used in a clockspring is coiled and held within the clockspring housing where the flat cable is repeatedly partially uncoiled and recoiled. However, since the flat
15 cable is coiled, the flat cable must be flexible. A smooth edge seam is determined to be smooth relative to the knurled seams located between adjacent conductors. As such, the smooth edge seams have a surface roughness which is less than the surface roughness of the knurled seams
20

located between adjacent conductors.

In a preferred embodiment the knurled flat cable 100 is made with the modular rotary anvil 70a as shown in Figure 6. The anvil 70a is called a modular rotary anvil since it is formed of discrete modular segments, sections, or inserts. Figures 8A and 9A display side views of two different forms of the modular rotary anvil. Figure 8A shows an assembly of knurled inserts 160, broad protrusion inserts 162, a large bracket insert 164, a small bracket insert 166, a first end segment 168, and a second end segment 170 which form the modular rotary anvil 70a. Figures 6 and 8B shows the knurled insert 160 having recesses 72 and knurled protrusions 74a. Figures 10A through 13B display some of the various individual inserts.

Figure 10A is a side view of the large bracket insert 164, and Figure 10B is a front view of the large bracket insert 164. Figure 11A is a side view of the small bracket insert 166, and Figure 11B is a front view of the small bracket insert. Figure 12A is a side view of the knurled insert 160, and Figure 12B is a front view of the knurled insert 160. Figure 8B shows details of the knurled insert 160. Figure 13A is a side view of the broad protrusion insert 162, and Figure 13B is a front view of the broad protrusion insert 162. The assembly of inserts and segments are held together with socket head cap screws. The socket head cap screws are countersunk into one of the large bracket insert 164 and the small bracket insert 166 and the socket head cap screws are threaded into one of the other of the large bracket insert 164 and the small bracket insert 166. The first end segment 168 is attached to the small bracket insert 166 with socket head cap screws and the second end segment 170 is attached to the large bracket insert 164 with socket head cap screws. Alternatively, the assembly of inserts and segments are held together on a common shaft and secured with a nut and lock washer. The modular rotary anvil 70a can then be mounted on the

ultrasonic welding machine as would any conventional rotary anvil.

The modular rotary anvil 70a can be used to make flat cable of many different dimensions and configurations. As described above, in regard to the flat cable 10, a different rotary anvil 70 was required if different seam width dimensions were necessary. Thus, a manufacturer of flat cable would be required to maintain a large inventory of rotary anvils. Such an inventory is expensive to produce and maintain. Furthermore, such an inventory relates directly to the cost of the flat cable produced. A further drawback to the rotary anvil concept is that the lag time between conception of a unique rotary anvil design and the finished manufactured rotary anvil is a relatively long period of time.

Applicant's modular rotary anvil 70a eliminates the need for a large inventory of rotary anvils. Instead, now, a manufacturer need only keep an inventory of different modular segments, sections, or inserts. The inserts can be built up or assembled in different ways to make a modular rotary anvil, where the modular rotary anvil produces a variety of flat cable designs. Such a concept supports flexible manufacturing needs, where the manufacture of different flat cable can be supported in a short amount of time. Thus, meeting the needs of the market. Furthermore, the invention of the modular rotary anvil results in flat cable which costs less to produce as compared to the prior art.

Figure 9A is a side view of another modular rotary anvil 70b which has cutting inserts 172 interspersed between knurled inserts 160. Figure 9B is a detailed view of a portion of Figure 9A showing the cutting inserts 172. The cutting insert 172 attach to the modular rotary anvil 70b the same way as did the broad protrusion insert 162 of the modular rotary anvil 70a. In the embodiments discussed above the plurality of flat cables produced by a single rotary anvil were

separated from each other by the cable splitter 89 shown in Figure 4. The cutting insert 172 eliminates the need for the cable splitter 89; thus, reducing the number of steps need to produce the flat cable. The cutting insert 172 achieves this result by being able to ultrasonically bond the upper and lower layers together to form a seam, while substantially simultaneously the cutting insert 172 cuts the flat cable of the just bonded seam. Other portions of the modular rotary anvil 70b are the same as the modular rotary anvil 70a described above.

In still yet another embodiment of the invention, a perspective view of a preferred edge seam semi-knurled flat cable 200 is shown in Figure 16. The edge seam semi-knurled flat cable 200 of Figure 16 is similar to the knurled flat cable 100 of the embodiment discussed above and shown in Figure 7, the differences between the two flat cables are discussed below. The upper layer 120 is bonded to the lower layer 130 preferably by ultrasonic welding using the plunging mode. The operation of the plunge mode is similar to that described in regard to the flat cable 100. However, in this embodiment, the modular rotary anvil would not have a smooth broad edge protrusion 75a forming the smooth continuous edge seam 115. Instead, the protrusion of the rotary modular anvil (not shown) has half of its width knurled and the other half smooth. Such a protrusion of the rotary modular anvil forms a semi-knurled edge seam 215. The semi-knurled edge seam 215 includes a first zone 217 adjacent one of the conductors which is knurled and a second zone 216 which is smooth, as shown in Figure 16.

The semi-knurled edge seam flat cable 200 has the advantage that when used in a clockspring, it is still quiet, due to the use of the smooth edge portion of the edge seam. However, this embodiment solves a problem by including the first zone 217 of the edge seam 215 which is knurled. The knurled seam requires less energy than the smooth continuous seam. Since the edge

seam 215 includes a knurled zone, the edge seam 215 requires less energy to bond the edge seam 215. The energy savings is then directed towards the seams located between the conductors, so as to make those seams 150 more strong. Otherwise, to ensure a proper bond between the upper layer 120 and the lower layer 130 at the location of the seams positioned between the conductors, the speed at which the flat cable exits the manufacturing machinery must be decreased. So the semi-knurled edge seam 215 enables the flat cable 200 to exit the manufacturing machinery at a high rate of speed while still maintaining its structural integrity.

Figure 17 is an expanded view of an alternative knurl or surface texture pattern as can be produced on flat cables 100 or 200. The raised surfaces or ribs 125 are smooth and the seam region 220, which corresponds to seams 150, can have a surface texture formed of a row of repeating parallel lines or linear segments, where the lines or linear segments are substantially perpendicular to a length dimension of the flat cable. Such a surface texture is easy to grasp, forms a strong bond, and is a relatively easy pattern to impart on the modular rotary anvil.

Figures 18-23 show end views of alternative conductors or conductor groups. Alternative conductor configurations solve various problems experienced while using flat cable. A single conductor 140 is inexpensive to manufacture and assemble. Depending on the radius of curvature that the flat cable experiences, the conductor 140 may experience large bending stresses. As such, it is better to reduce the stresses by making the conductor smaller. Furthermore, a smaller conductor requires less force to bend the flat cable. Additionally, alternative conductor combinations make it possible to carry higher current loads for a short amount of time. Figure 18 is an end view of a single conductor 140 having a width, w , and a thickness, t , as shown in the previous embodiments. Figure 24 is an exploded, perspective view of the single flat conductor 140

assembled with an upper insulation layer 120 and a lower insulation layer 130. The upper and lower insulation layers 120, 130 are shown separated from each other for reasons of clarity. The single conductor shown is just one of many that would populate the flat ribbon cable.

Figure 19 is an end view of a dual or tandem conductor group 240, where each of the individual conductors 241, 242 are substantially identical to each other. In this embodiment, each of the conductors 242, 241 has a thickness, t , which is similar to that of the single conductor 140, and a width, $w/2$, which is substantially one-half of the width of the single conductor 140. Thus, the dual or tandem conductor group 240 fits within the pre-existing space of the single flat conductor 140. Therefore, the shape of the rotary modular anvil does not change. Figure 25 is an exploded, perspective view of the dual or tandem conductor group 240 assembled with an upper insulation layer 120 and a lower insulation layer 130. The dual or tandem conductor group shown is just one of many that would populate the flat ribbon cable.

Figure 20 is an end view of a dual stacked conductor group 243, where each of the individual conductors 244, 245 are substantially identical to each other. In this embodiment, each of the conductors 244, 245 has a thickness, $t/2$, which is one-half of the thickness of the single conductor 140, and has a width, w , which is similar to that of the single conductor 140. Thus, the dual stacked conductor group 243 fits within the pre-existing space of the single flat conductor 140. Therefore, the shape of the rotary modular anvil does not change. Figure 27 is an exploded, perspective view of the dual stacked conductor group 243 assembled with an upper insulation layer 120 and a lower insulation layer 130. The dual stacked conductor group shown is just one of many that would populate the flat ribbon cable.

Figure 21 is an end view of a triple stacked conductor group 246, where each of the

individual conductors 247, 248, 249 are substantially identical to each other. In this embodiment, each individual conductor 247, 248, 249 has a thickness, $t/3$, which is substantially one-third of the thickness of the original conductor 140, and a width, w , which is similar to that of the original conductor 140. Thus, the triple stacked conductor group 246 fits within the pre-existing space of the single flat conductor 140. Therefore, the shape of the rotary modular anvil does not change.

Figure 26 is an exploded, perspective view of the triple stacked conductor group 246 assembled with an upper insulation layer 120 and a lower insulation layer 130. The triple stacked conductor group shown is just one of many that would populate the flat ribbon cable.

Figure 22 is an end view of a wire rope conductor group 250. Figure 23 is an end view of a wire rope conductor 250 after the wire rope conductor 150 has been compressed. Seven individual wires are shown. Each wire is approximately 24 gauge. The compressed wire rope conductor 250 has a thickness, t , similar to that of the original conductor 140, and a width, w , similar to that of the original conductor 140. Thus, the wire rope conductor group 250 fits within the pre-existing space of the single flat conductor 140. Therefore, the shape of the rotary modular anvil does not change. Figure 28 is an exploded, perspective view of the compressed wire rope conductor group 250 assembled with an upper insulation layer 120 and a lower insulation layer 130. The compressed wire rope conductor group shown is just one of many that would populate the flat ribbon cable.

Furthermore, a single flat ribbon cable can include conductors of various forms. As an example, a flat cable can have seven conductors. The first conductor can be a single flat conductor 140, the second conductor can be a dual or tandem conductor 240, the third conductor can be a dual stacked conductor 243, the fourth conductor can be a triple stack conductor 246, the fifth conductor can be a compressed wire rope conductor 250, the sixth conductor can be an optical fiber 141, and

the seventh conductor can be a single flat conductor 140. Other combinations of conductors are possible and can be suited to the industrial requirements of the use of the device.

Other embodiments are also envisioned such as a clockspring containing flat cable, where the clockspring connects crash sensors to an airbag located in a harness-type seat belt. Such a clockspring would take-up the slack of the seat belt when the seat belt spooled and un-spooled. Non-automotive applications are also envisioned.

It should be understood that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications may be made without departing from the spirit and scope of the present invention and without diminishing its attendant advantages. It is, therefore, intended that such changes and modifications be covered by the appended claims.

CLAIMS

What is claimed is:

1. A flat electrical cable comprising:

an upper insulator layer;

5 a lower insulator layer connected to the upper layer along substantially continuous parallel spaced apart seams; and

an intermediate layer comprised of individual strands of conductors which lie adjacent and substantially parallel to the seams, and the conductors do not have an adhesive residue thereon, wherein seams positioned between adjacent conductors have a textured surface pattern, and wherein seams positioned along edges of the flat electrical cable have a substantially smooth surface pattern.

2. The flat electrical cable of Claim 1 wherein the upper layer includes a plurality of raised surfaces running parallel to each other along the length of the flat cable.

3. The flat electrical cable of Claim 1 wherein the upper and lower insulator layers are polyester.

4. The flat electrical cable of Claim 1 wherein the conductors are made of at least one of a copper material and a copper alloy.

5. The flat electrical cable of Claim 1 wherein at least one of the conductors is a fiber optic cable.

6. The flat electrical cable of Claim 1 wherein at least one of the seams is ultrasonically welded.

7. The flat electrical cable of Claim 6 wherein the at least one of the seams is positioned

along an edge of the flat electrical cable and is broader than at least one of the seams positioned between adjacent conductors.

8. The flat electrical cable of Claim 7 wherein the at least one of the seams being positioned along an edge of the flat electrical cable is produced by a broad protrusion on an ultrasonic welding anvil.

9. The flat electrical cable of Claim 6 wherein at least one of said seams being positioned along an edge of the flat electrical cable is cut so as to form a smooth edge thereon.

10. The flat electrical cable of Claim 1 wherein seams positioned along edges of the flat electrical cable are broader than seams positioned between adjacent conductors.

11. The flat electrical cable of Claim 1 wherein seams positioned along edges of the flat electrical cable are cut so as to form a smooth edge thereon.

12. The flat electrical cable of Claim 1 wherein the conductors are exposed at an end portion of the flat cable beyond the upper and lower insulator layers.

13. The flat electrical cable of Claim 1 wherein the cable includes a continuous seam except for a nonbonded area where the upper and lower insulator layers are not connected.

14. The flat electrical cable of Claim 1 wherein the cable includes a continuous seam except for a nonbonded area where the upper and lower insulator layers include windows that expose the conductors.

15. The flat electrical cable of Claim 1 wherein seams positioned between adjacent conductors have a knurled textured surface pattern.

16. The flat electrical cable of Claim 3 wherein the conductors include seven conductors.

17. The flat electrical cable of Claim 16 wherein the flat electrical cable has a linear density

of substantially 4.35 grams per foot.

18. A flat electrical cable comprising:

an upper layer of polyester having a ribbed surface;

a lower layer of polyester connected to the upper layer along substantially continuous

5 parallel spaced apart ultrasonically bonded seams; and

individual strands of copper conductors lying substantially parallel and adjacent to the seams between the upper and lower layers, and wherein seams positioned between adjacent conductors have a textured surface pattern, and wherein seams positioned along edges of the flat electrical cable have a substantially smooth surface pattern.

10 19. The flat electrical cable of Claim 18 wherein seams positioned between adjacent conductors have a knurled textured surface pattern.

20. The flat electrical cable of Claim 18 wherein seams positioned between adjacent conductors have a repeating linear segment textured surface pattern, wherein the repeating linear segments are substantially perpendicular to a length of the flat electrical cable.

15 21. A flat electrical cable comprising:

an upper layer of polyester having a ribbed surface;

a lower layer of polyester connected to the upper layer along substantially continuous parallel spaced apart ultrasonically bonded seams; and

20 individual strands of copper conductors lying substantially parallel and adjacent to the seams between the upper and lower layers, and wherein seams positioned between adjacent conductors have a textured surface pattern, and wherein seams positioned along edges of the flat electrical cable have a first zone and a second zone, and wherein

the first zone is adjacent to one conductor of the conductors and extends substantially parallel to the one conductor, and the first zone having a knurled textured surface pattern, and wherein

the second zone is located between the first zone and one edge of the edges, and the second zone having a smooth textured surface pattern.

22. A flat cable comprising:

an upper insulator layer;

a lower insulator layer connected to the upper insulator layer along substantially continuous parallel spaced apart seams; and

an intermediate layer comprised of conductor groups which lie adjacent and substantially parallel to the seams, and wherein the conductor groups do not have an adhesive residue thereon.

23. The flat cable of Claim 22 wherein one of the conductor groups includes a single conductor.

24. The flat cable of Claim 22 wherein one of the conductor groups includes an optical fiber.

25. The flat cable of Claim 22 wherein one of the conductor groups includes a tandem conductor group, wherein the tandem conductor group includes two substantially identical conductors positioned adjacent to each other.

26. The flat cable of Claim 22 wherein one of the conductor groups includes a dual stacked conductor group, wherein the dual stacked conductor group includes two substantially identical conductors, wherein a first conductor of the two substantially identical conductors is stacked on a second conductor of the two substantially identical conductors of the dual stacked conductor group.

27. The flat cable of Claim 22 wherein one of the conductor groups includes a triple stacked conductor group, wherein the triple stacked conductor group includes three substantially identical conductors, wherein a first conductor of the three substantially identical conductors is positioned adjacent to a second conductor of the three substantially identical conductors of the triple stacked conductor group, and wherein the second conductor of the three substantially identical conductors is positioned adjacent to a third conductor of the three substantially identical conductors of the triple stacked conductor group.

28. The flat cable of Claim 22 wherein one of the conductor groups includes a wire rope conductor group, wherein the wire rope conductor group includes a plurality of wire conductors wound together.

29. The flat cable of Claim 25 wherein another of the conductor groups includes a wire rope conductor group, wherein the wire rope conductor group includes a plurality of wire conductors wound together.

30. A flat electrical cable comprising:
an upper insulator layer;
a lower insulator layer connected to the upper layer along substantially continuous parallel spaced apart seams; and

an intermediate layer comprised of individual strands of conductors which lie adjacent and substantially parallel to the seams, and the conductors do not have an adhesive residue thereon,
wherein seams positioned between adjacent conductors have a first textured surface pattern, and
wherein seams positioned along edges of the flat electrical cable have a second surface pattern, and
wherein a surface roughness of the first textured surface pattern is greater than a surface roughness

of the second textured surface pattern.

31. A clockspring for electrically connecting an airbag of a vehicle to crash sensors, the clockspring comprising:

a housing having an inner chamber; and

5 a flat electrical cable including an upper insulator layer; a lower insulator layer connected to the upper layer along substantially continuous parallel spaced-apart seams; and an intermediate layer comprised of individual strands of conductors which lie adjacent and substantially parallel to the seams and the conductors do not have an adhesive residue thereon, the flat electrical cable being mounted in the chamber of the clockspring, and wherein seams positioned between adjacent
10 conductors have a textured surface pattern, and wherein seams positioned along edges of the flat electrical cable have a substantially smooth surface pattern.

32. The clockspring of Claim 31 wherein seams positioned between adjacent conductors have a knurled textured surface pattern.

33. The clockspring of Claim 31 wherein the upper layer includes a plurality of raised
15 surfaces running parallel to each other along the length of the flat cable.

34. The clockspring of Claim 31 wherein the upper and lower insulator layers are polyester.

35. The clockspring of Claim 31 wherein the conductors are copper.

36. The clockspring of Claim 31 wherein at least one of the conductors is a fiber optic
cable.

20 37. The clockspring of Claim 31 wherein the seams are ultrasonically welded.

38. The clockspring of Claim 31 wherein the conductors are exposed at an end portion of the flat cable beyond the upper and lower insulator layers.

39. The clockspring of Claim 31 wherein the cable includes a continuous seam except for a nonbonded area where the upper and lower insulator layers are not connected.

40. The clockspring of Claim 31 wherein the cable includes a continuous seam except for a nonbonded area where the upper and lower insulator layers include windows that expose the
5 conductors.

41. The clockspring of Claim 31 wherein the upper and lower insulator layers are polyester, and wherein the upper insulator layer has a ribbed surface, and wherein the individual strands of conductors are copper, and wherein the substantially continuous parallel spaced-apart seams are ultrasonically welded.

42. The clockspring of Claim 31 wherein seams positioned along edges of the flat electrical
10 cable are broader than seams positioned between adjacent conductors.

43. The clockspring of Claim 41 wherein seams positioned along edges of the flat electrical cable are produced by a broad protrusion on an ultrasonic welding anvil.

44. The clockspring of Claim 43 wherein seams positioned along edges of the flat electrical
15 cable are cut so as to form a smooth edge thereon.

45. The clockspring of Claim 43 wherein seams positioned along edges of the flat electrical cable are broader than seams positioned between adjacent conductors.

46. The clockspring of Claim 45 wherein seams positioned along edges of the flat electrical cable are cut so as to form a smooth edge thereon.

20 47. A modular rotary anvil for mounting on an ultrasonic welding machine, the modular rotary anvil comprising:

a first end segment configured to attach to the ultrasonic welding machine;

a second end segment configured to attach to the ultrasonic welding machine; and
at least one insert having a first side and a second side, each of the first side and the
second side configured to attach to at least one of other inserts, the first end segment, and the
second end segment.

5 48. The modular rotary anvil as recited in Claim 47 wherein the at least one insert has a
textured surface pattern.

49. The modular rotary anvil as recited in Claim 48 wherein the textured surface pattern
is a knurled surface pattern.

50 50. The modular rotary anvil as recited in Claim 47 wherein the at least one insert has a
flat, smooth surface pattern.

51. The modular rotary anvil as recited in Claim 47 wherein the at least one insert has a
cutting surface.

52. The modular rotary anvil as recited in Claim 47 wherein the at least one insert has at
least one recessed groove.

15 53. The modular rotary anvil as recited in Claim 52 wherein the at least one insert has a
cutting surface.

54. The modular rotary anvil as recited in Claim 47 wherein the at least one insert has at
least one protrusion.

20 55. The modular rotary anvil as recited in Claim 54 wherein the at least one protrusion
extends around a circumference of the at least one insert.

56. The modular rotary anvil as recited in Claim 55 wherein the at least one protrusion
has a flat, smooth surface texture pattern.

57. The modular rotary anvil as recited in Claim 55 wherein the at least one protrusion has a textured surface pattern.

58. The modular rotary anvil as recited in Claim 57 wherein the textured surface pattern is a knurled surface pattern.

5 59. The modular rotary anvil as recited in Claim 52 wherein the at least one recessed groove extends around a circumference of the at least one insert.

60. The modular rotary anvil as recited in Claim 59 wherein the at least one recessed groove has a flat, smooth surface textured pattern.

61. A method of assembling a flat electrical cable comprising the steps of:
10 simultaneously feeding an upper and lower layer of insulating material and an intermediate layer of conductors between a horn and a modular rotary anvil; and
ultrasonically bonding the upper and lower layers together along a seam substantially parallel and adjacent the conductors.

62. The method of Claim 61 wherein the step of ultrasonically bonding includes the horn
15 operating in a plunge mode.

63. The method of Claim 61 wherein the step of simultaneously feeding includes the modular rotary anvil having at least one segment having a series of grooves and protrusions corresponding to the arrangement of the conductors oriented between the insulator layers wherein the insulator layers are compressed between the protruding portion and a weld surface of the
20 rotary horn in order to form the seams.

64. The method of Claim 63 wherein at least one of the protrusions of the modular rotary anvil has a textured surface pattern.

65. The method of Claim 64 wherein the textured surface pattern is a knurled surface pattern.

66. The method of Claim 63 wherein at least one of the protrusions of the modular rotary anvil has a smooth surface pattern.

5 67. The method of Claim 61, further comprising the steps of cutting the flat cable into individual lengths and stripping ends of the flat cable.

68. The method of Claim 67 wherein the step of stripping includes the sub-steps of removing the upper and lower insulator layers so as to leave the conductors exposed and protruding beyond the end of the flat cable.

10 69. The method of Claim 67 wherein the step of stripping includes the sub-step of inserting the end of the flat cable into a rotary grinding machine to remove the upper and lower insulator layers to expose a width of the conductors, and removing the excess end portion of the cable to leave the protruding conductors.

15 70. The method of Claim 61, further comprising the step of testing the assembled flat cable for the presence of bonded seams.

71. The method of Claim 61 wherein the step of simultaneously feeding the intermediate layer of conductors includes at least one conductor which is a fiber optic cable.

20 72. A method of assembling a clockspring comprising the steps of:
making a flat cable including the sub-steps of simultaneously feeding an upper and lower layer of insulating material and an intermediate layer of conductors between a horn and a modular rotary anvil, and ultrasonically bonding the upper and lower layers together along a seam substantially parallel and adjacent the conductors; and

inserting the flat cable into a housing.

73. The method of Claim 72 wherein the sub-step of ultrasonically bonding includes the horn operating in a plunge mode.

74. The method of Claim 72 wherein the sub-step of simultaneously feeding the intermediate layer of conductors includes at least one conductor which is a fiber optic cable.

75. The method of Claim 74 wherein the sub-step of simultaneously feeding includes the modular rotary anvil having at least one segment having a series of grooves and protrusions corresponding to the arrangement of the conductors oriented between the insulator layers wherein the insulator layers are compressed between the protruding portion and a weld surface of the rotary horn in order to form the seams.

76. The method of Claim 75 wherein at least one of the protrusions of the modular rotary anvil has a textured surface pattern.

77. The method of Claim 76 wherein the textured surface pattern is a knurled surface pattern.

78. The method of Claim 75 wherein at least one of the protrusions of the modular rotary anvil has a smooth surface pattern.

79. The method of Claim 72, further comprising the step of stripping a first end of the flat cable so as to expose the conductors, and further comprising the step of attaching an electrical connector to the first end of the flat cable, and wherein the electrical connector is mounted to the housing, and wherein the step of attaching immediately follows the step of stripping.

ABSTRACT OF THE INVENTION

A flat electrical cable and a modular rotary anvil for assembling a flat electrical cable is provided wherein the flat cable includes an upper layer having ribs protruding along its length and substantially parallel to one another, continuous substantially parallel and adjacent seams formed between and upper and lower insulator layer conductors between the upper and lower layer adjacent the seams and a pattern formed in the surface of the lower insulator layer. The present invention may have upper and lower polyester layers having copper conductors therebetween and the seams ultrasonically welded in order to provide flat electrical cable for various applications such as incorporation in an automobile clockspring. The modular rotary anvil includes multiple removable and interchangeable segments or inserts which provide the ability to impart a smooth or knurled textured surface pattern to the work-piece. Other inserts include cutting inserts which provide for a seam on the work-piece while at the same time cuts the work-piece along a seam.

Fig. 1

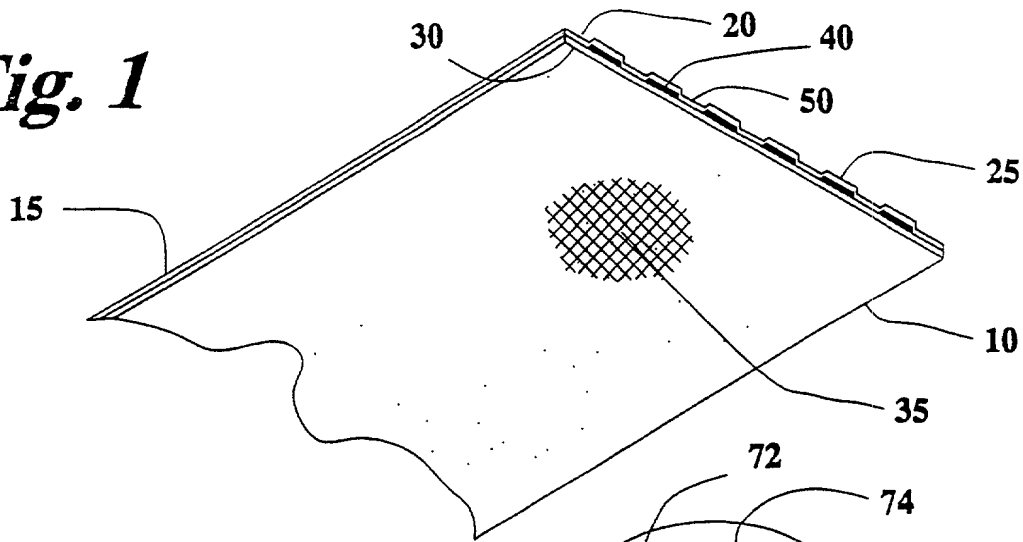


Fig. 2

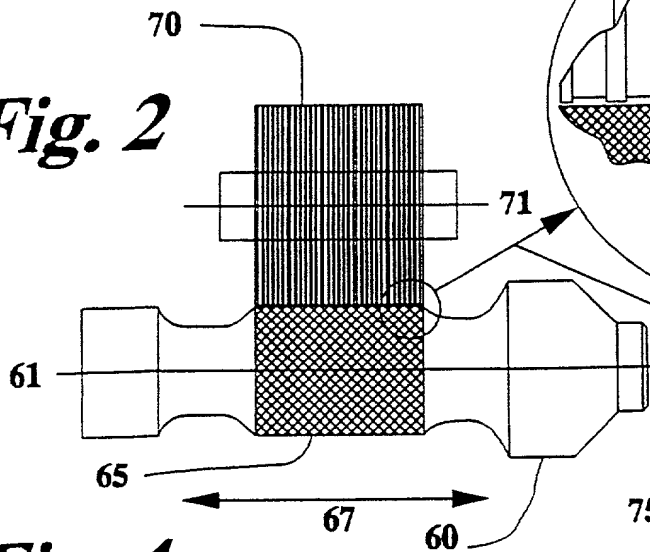


Fig. 3

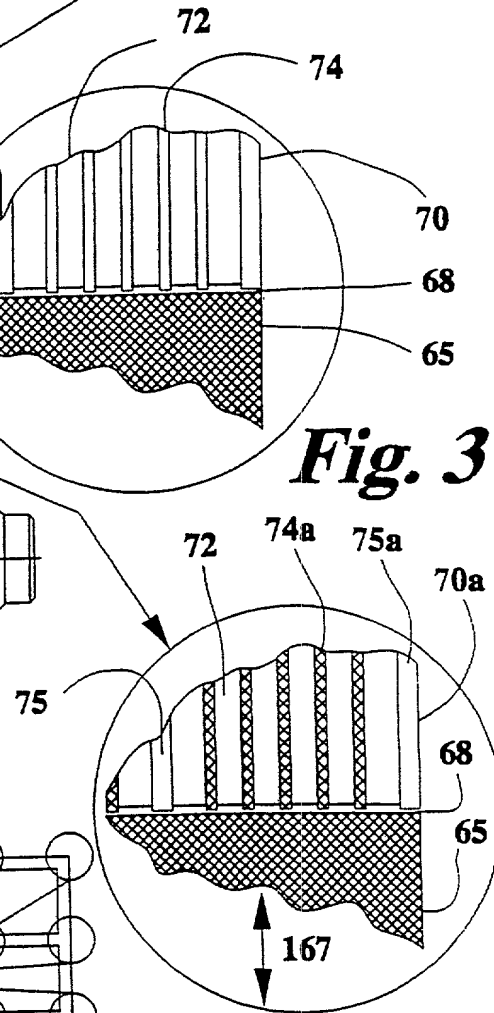


Fig. 4

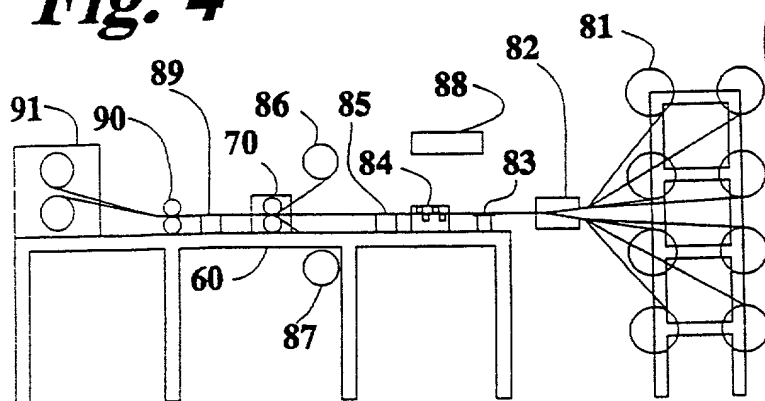


Fig. 6

Fig. 5

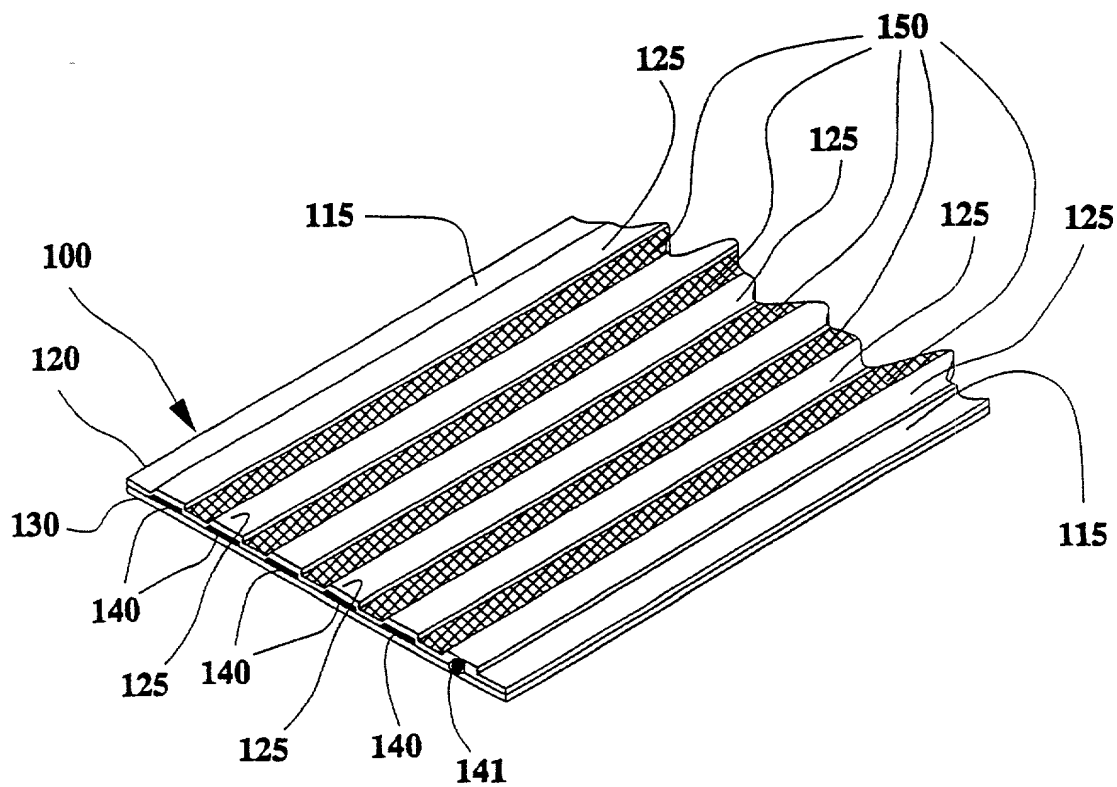
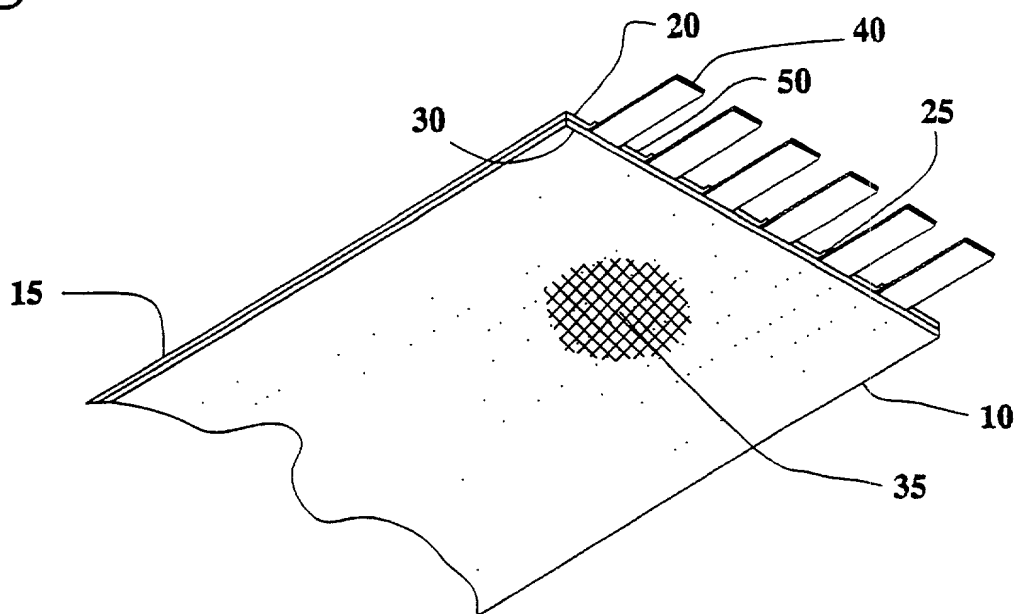


Fig. 7

Fig. 8A

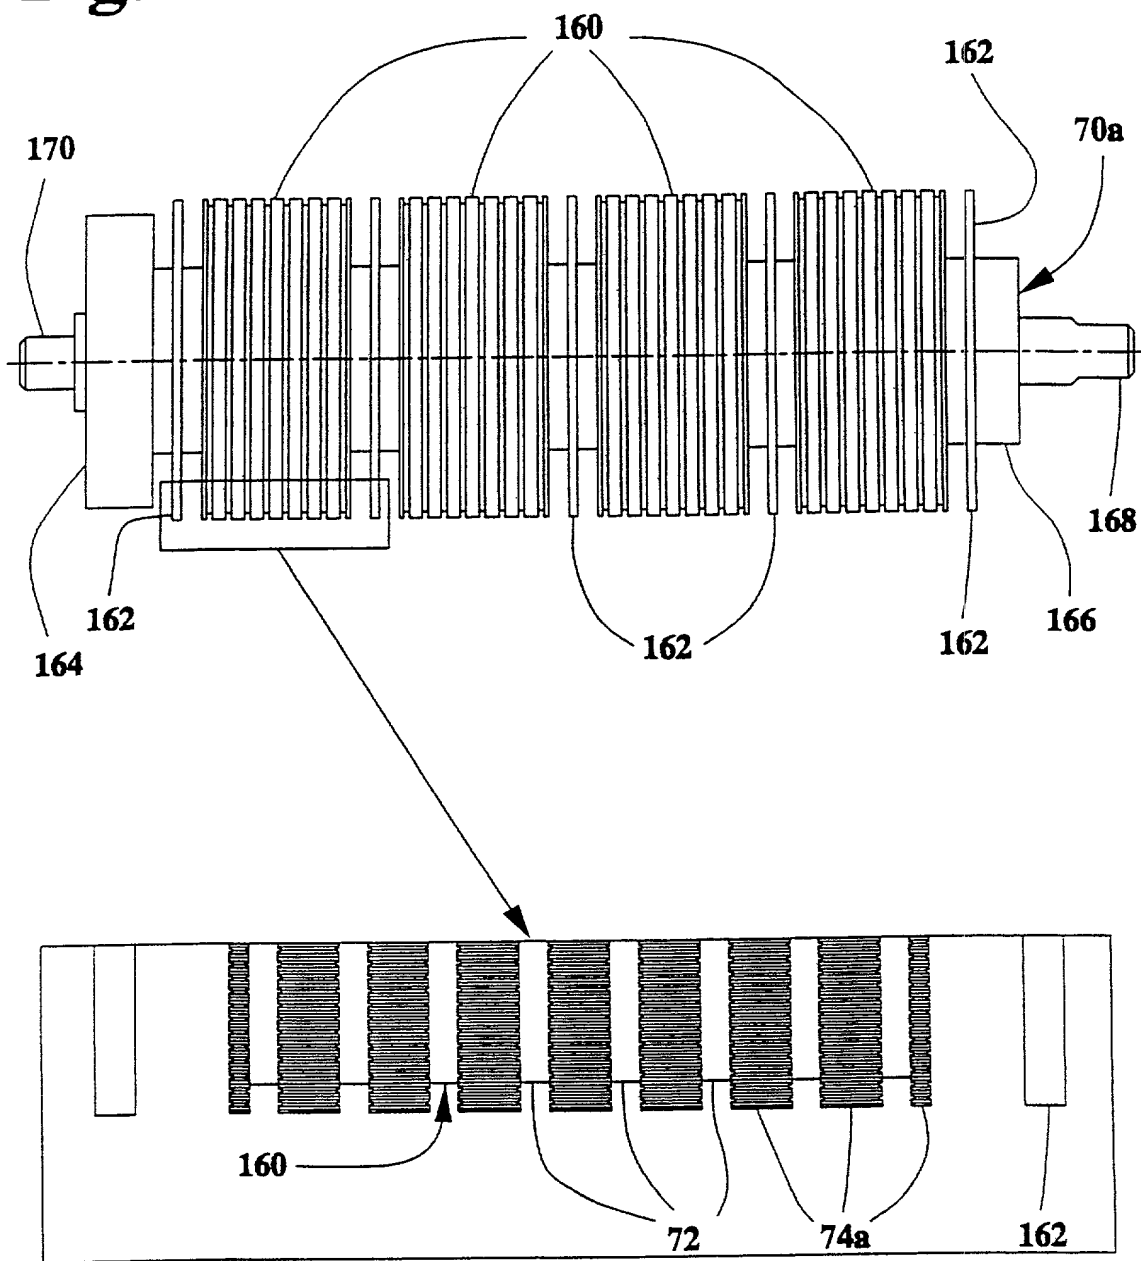


Fig. 8B

Fig. 9A

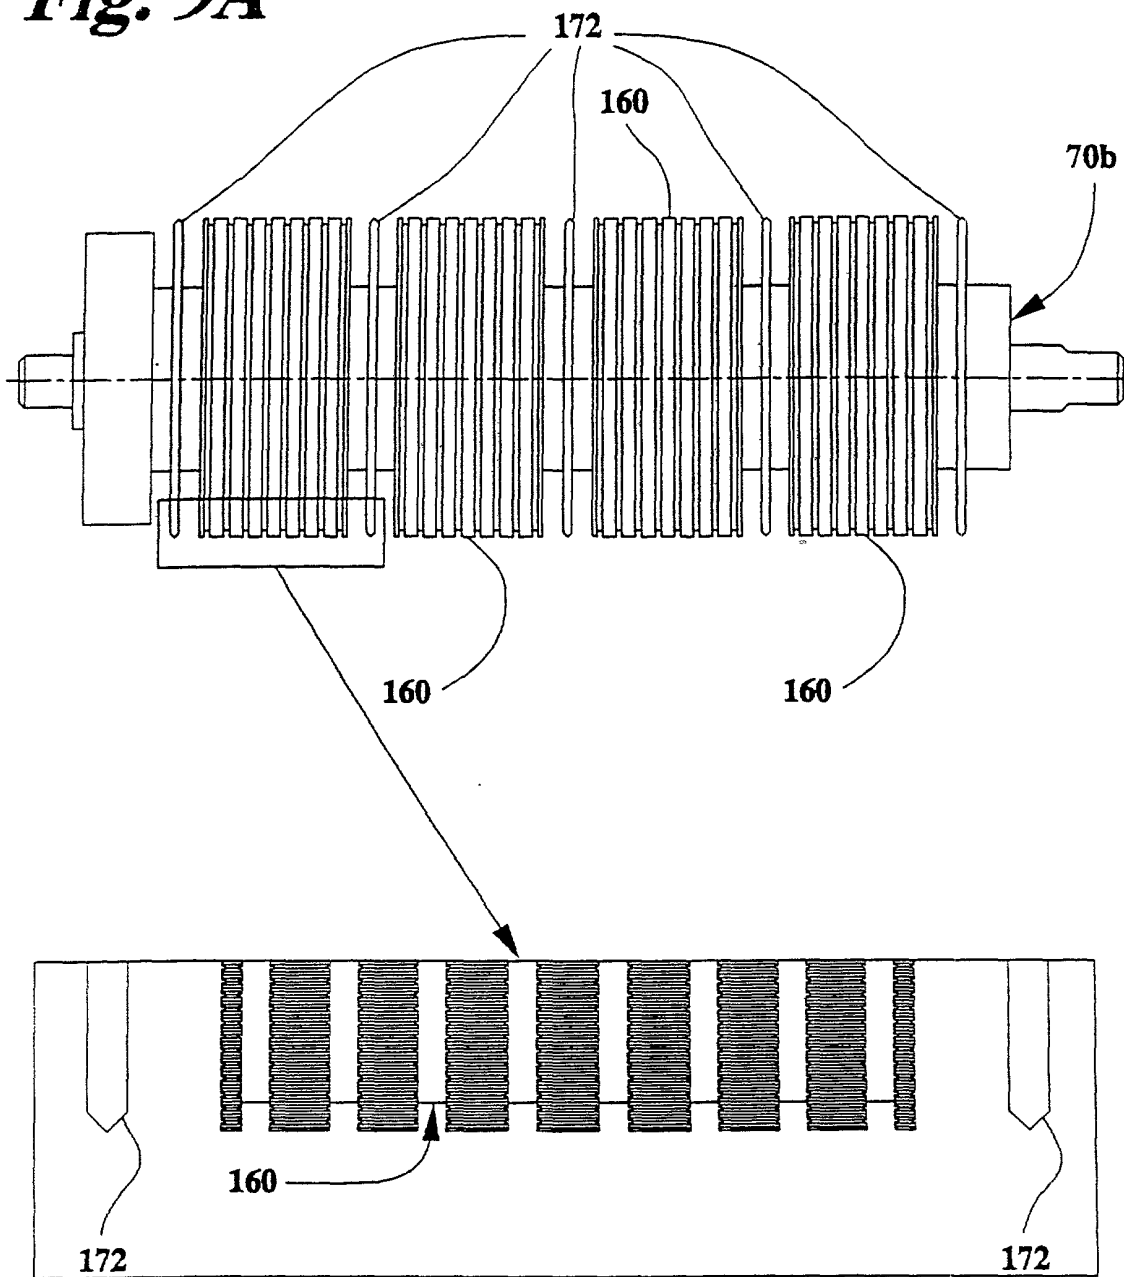


Fig. 9B

Fig. 10A

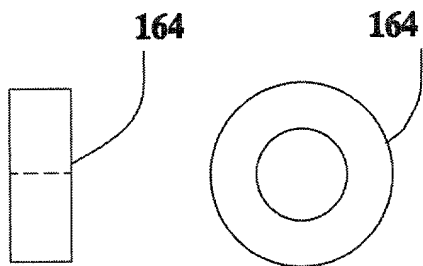


Fig. 12A

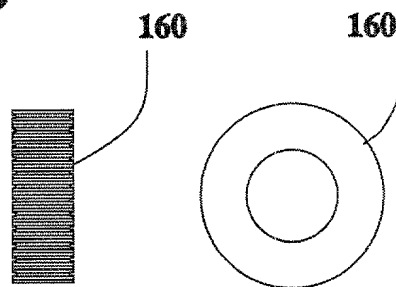


Fig. 10B

Fig. 12B

Fig. 11A

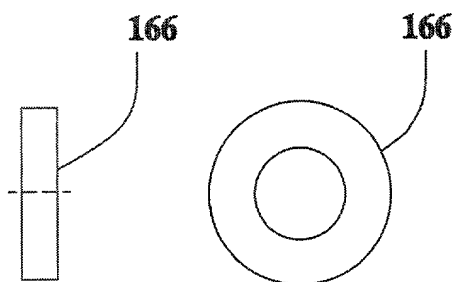


Fig. 13A

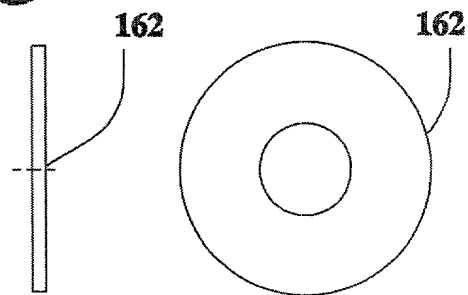


Fig. 11B

Fig. 13B

Fig. 14

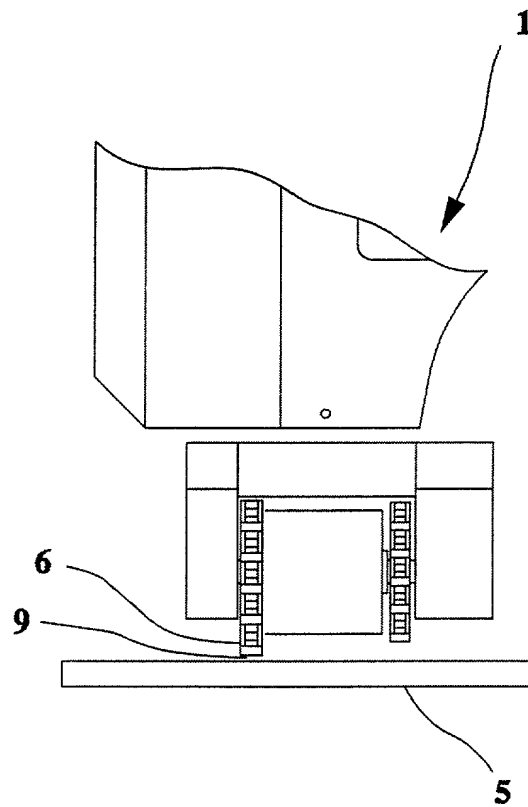
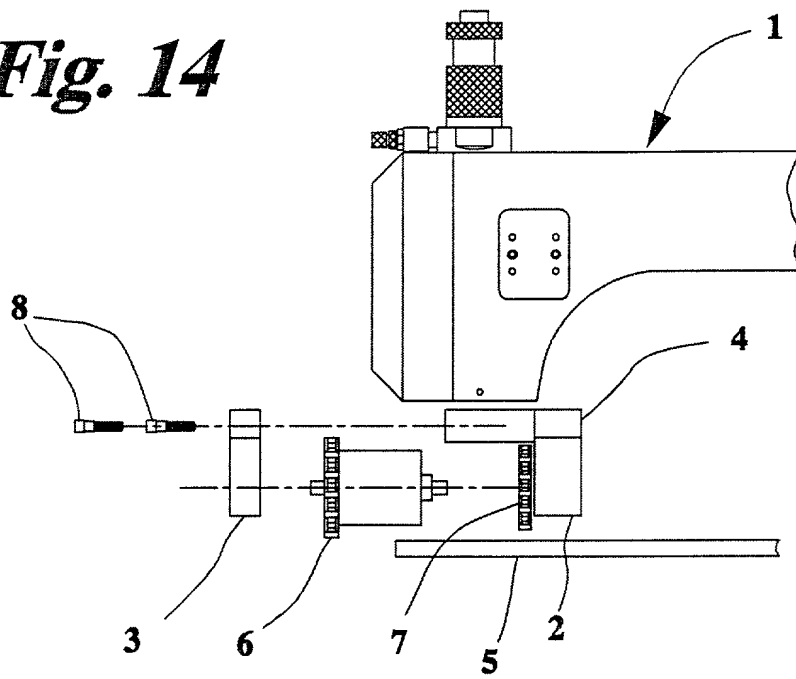


Fig. 15

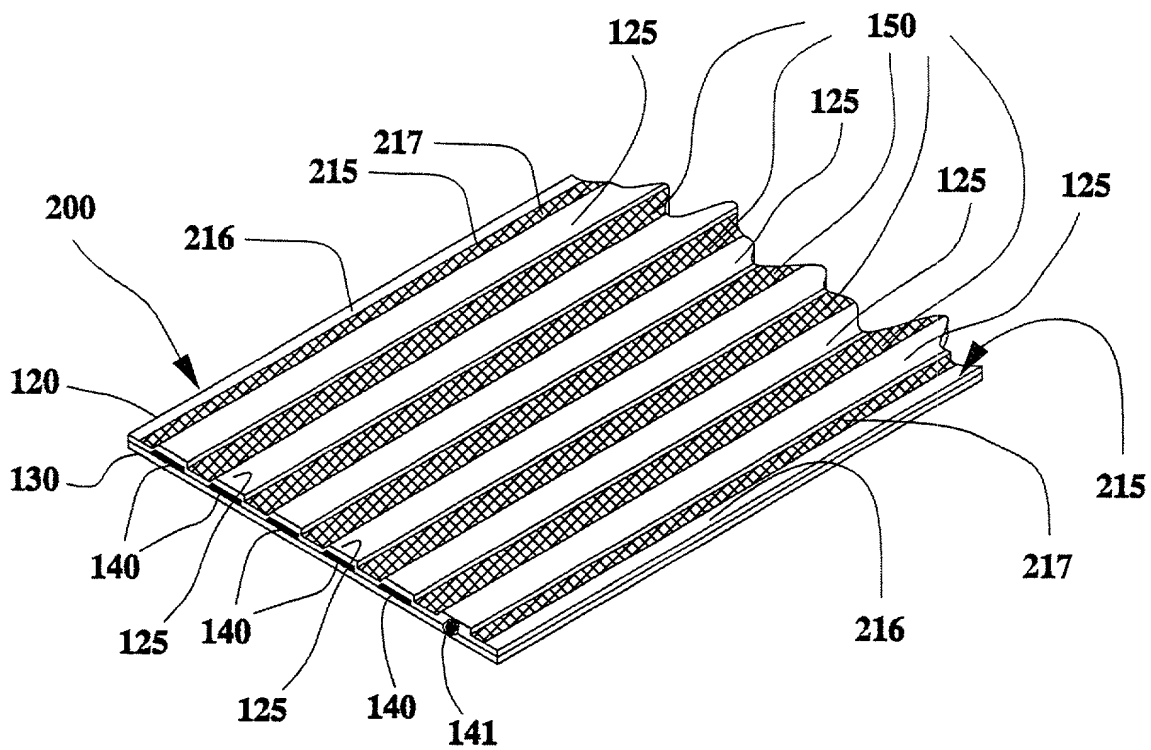


Fig. 16

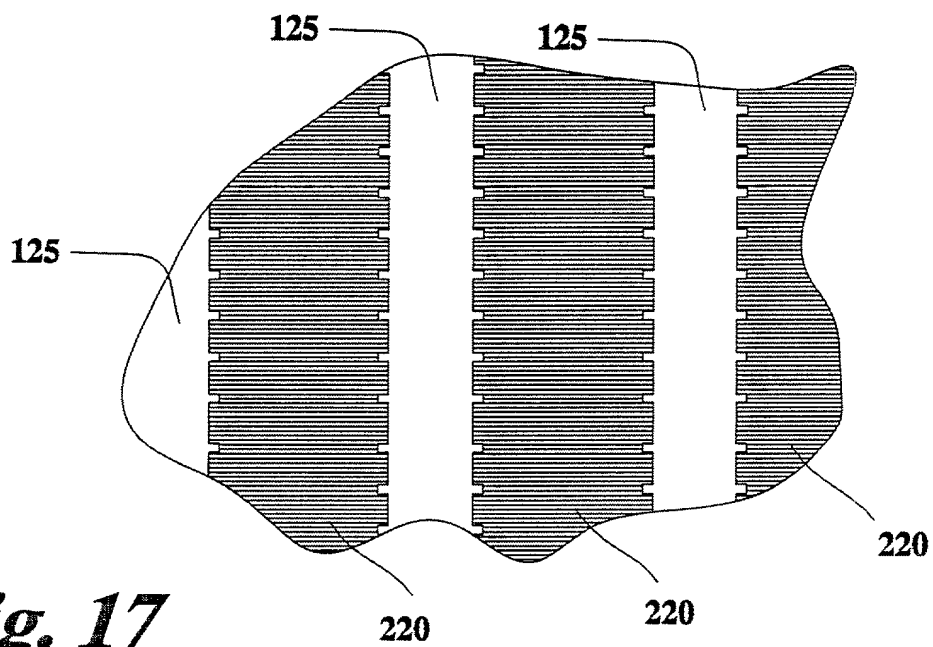


Fig. 17

Fig. 18

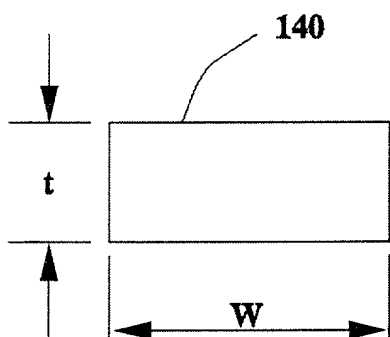


Fig. 19

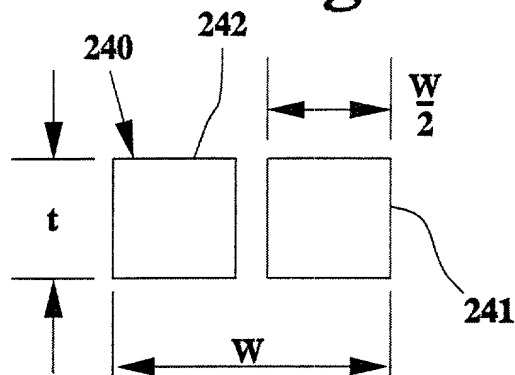


Fig. 20

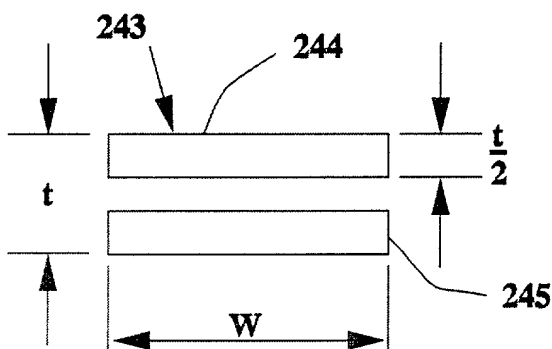


Fig. 21

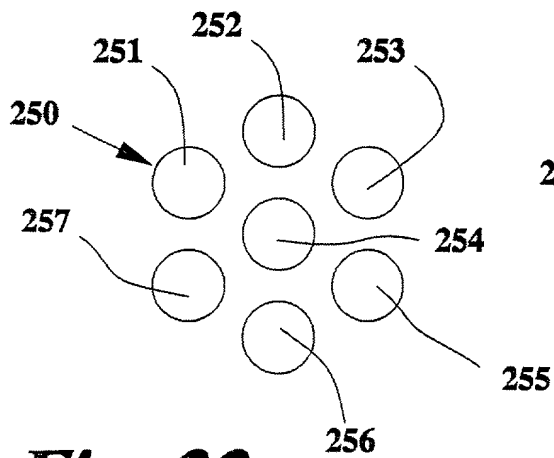
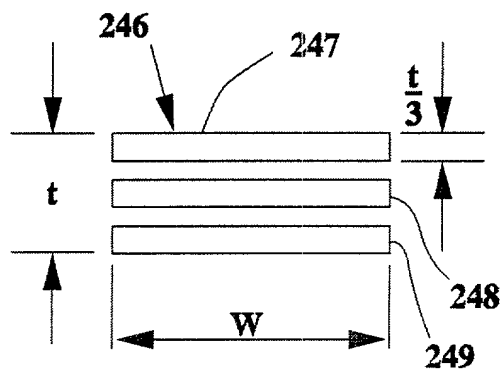


Fig. 22

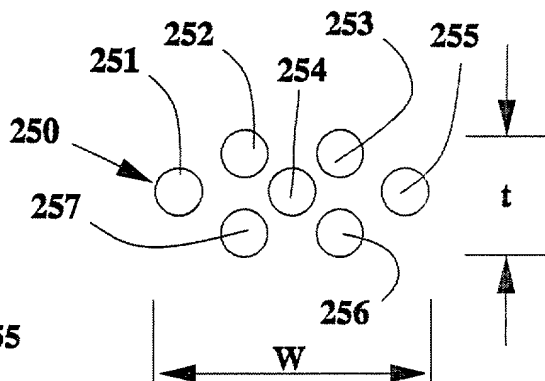


Fig. 23

Fig. 24

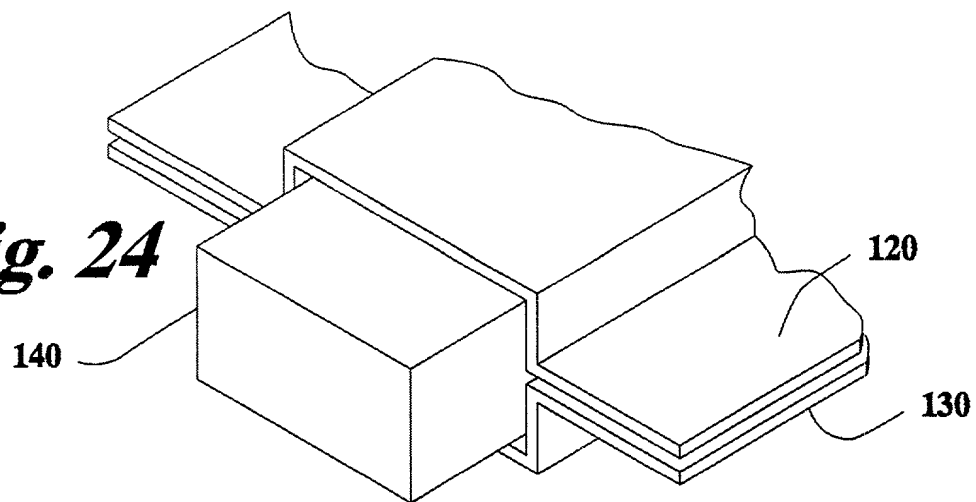


Fig. 25

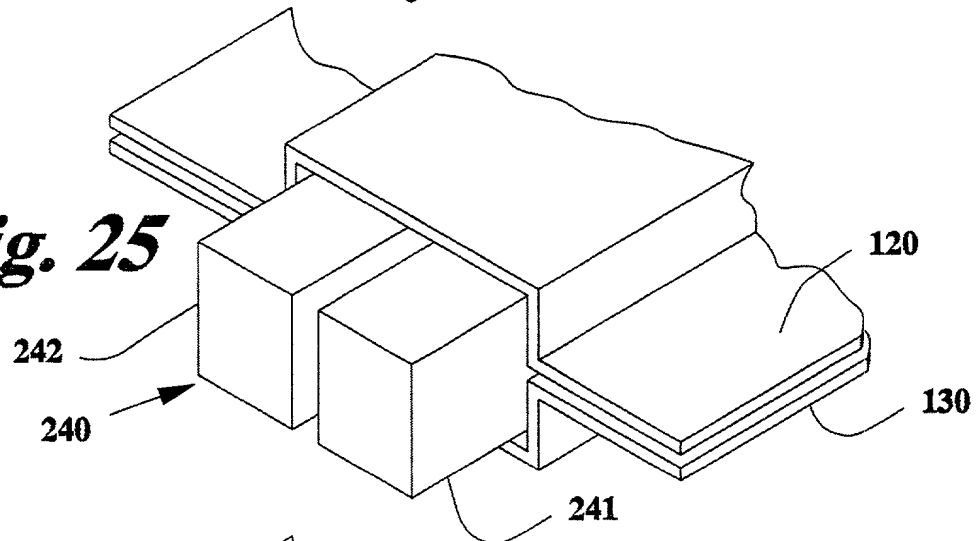


Fig. 26

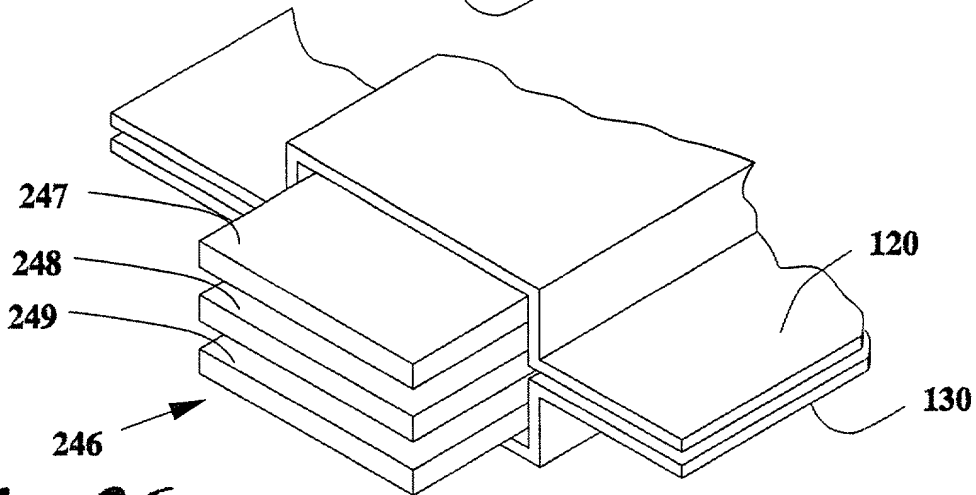


Fig. 27

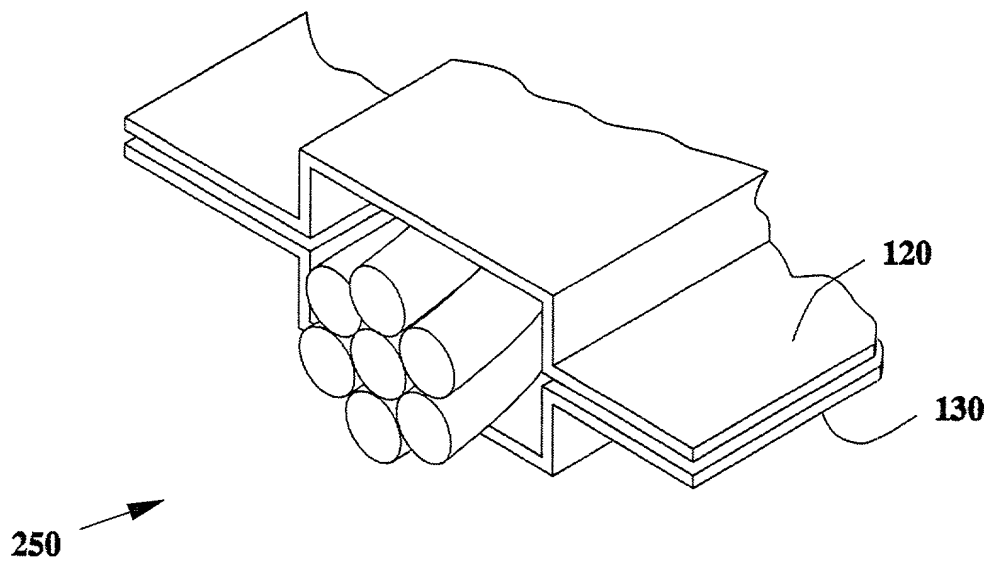
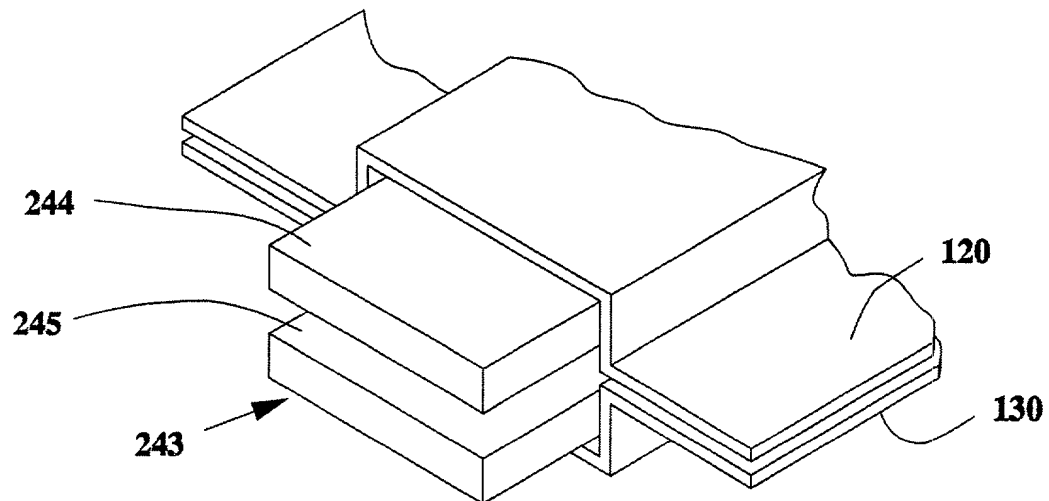


Fig. 28

As below-named inventors, we hereby declare that:

I believe I am an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FLAT CABLE AND MODULAR ROTARY ANVIL TO MAKE SAME

In the specification of which

 X is attached hereto.
 was filed on _____, as U.S. Application No. _____
or PCT International Application Serial No. _____
and was amended on _____ (if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

We do not know and do not believe that the same was ever known or used in the United States of America before our invention thereof, or patented or described in any printed publication in any country before our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by us or our legal representatives or assigns more than twelve months prior to this application.

We hereby claim foreign priority benefits under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>(Number)</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

We hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)
--------------------------	---------------	--

(Application Serial No.)	(Filing Date)	(Status -- patented, pending, abandoned)
--------------------------	---------------	--

We hereby appoint to prosecute and transact all business in the Patent and Trademark Office connected therewith as our attorneys: David L. Newman, Esq., Reg. No. 37,196, Karl D. Kovach, Reg. No. 40,278, and Steven M. Evans, Esq., Reg. No. 35,503, whose mailing address and telephone number is METHODE ELECTRONICS, INC., 7444 West Wilson Avenue, Chicago, IL 60656-4549, (708) 867-9600, and Messrs. John D. Simpson (Reg. No. 19,842), Lewis T. Steadman (Reg. No. 17,074), Dennis A. Gross (Reg. No. 24,410), Steven H. Noll (Reg. No. 28,982), Kevin W. Guynn (Reg. No. 29,927), Robert M. Ward (26,517), Robert M. Barrett (Reg. No. 30,142), Brett A. Valiquet (Reg. No. 27,841), Edward A. Lehman (Reg. No. 22,312), James D. Hobart (Reg. No. 24,149), Melvin A. Robinson (Reg. No. 31,870), David R. Metzger (Reg. No. 32,919), John R. Garrett (Reg. No. 27,888), Paula J. Kelly (37,624), John W. Cornell (30,619), Robert J. Depke (37,067) Joseph P. Reagen (35,332), Michael R. Hull (35,902), Michael S. Leonard (37,557), and Marvin Moody (16,549), all members of the firm of HILL & SIMPSON, A Professional Corporation with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith and direct that all correspondence be forwarded to:

David L. Newman, Esq.
Methode Electronics, Inc.
7444 West Wilson Avenue
Chicago, Illinois 60656

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Inventor: Tom Schilson

Inventor's Signature: Tom Schilson Date: 11-30-99

Residence: Hamilton, Illinois

Citizenship: U.S.A

Post Office Address: 861 East Country Rd., #1200, Hamilton, IL 62341

Full Name of Second Inventor: Steve Kamps

Inventor's Signature: Steve Kamps Date: 11/30/99

Residence: Warsaw, Illinois

Citizenship: U.S.A.

Post Office Address: 115 N 600N, Warsaw, IL 62379

Express Mail No. E5059308855 us

Date of Deposit Dec - 8, 1999

I hereby certify that this paper
is being deposited with the United States
Postal Service "Express Mail Post Office
to Addressee" service, under 37 CFR § 1.10
on the date indicated above and is addressed
to BOX PAT. APPLN., Commissioner of Patents
and Trademarks, Washington, D.C. 20231.

Sandy Barnes